

cerasonar 4040x1 hp

Small High-Performance Soundpanel for room sizes of 5-15 square meters. Ideal for multiroom or surround applications. Qualified for dry walls and suspended ceilings with a substructure spacing of 40 cm

* Power rating as per application of a high-pass filter. No electronic low-frequency boost must be used. Resulting damage from mechanical overload are excluded from the warranty.

** Max. pulse power rating. The load capacity can be increased when operated via electronic high-pass filters of an AV receiver (min. 150 Hz / 12 dB) and speaker size set to „small“ or in conjunction with a multiroom amplifier with respective equalization adjustment options.




Back view

Technical specifications

Power rating:	25W * (50W **)
Impedance:	8 Ohm
Driver:	1 Exciter
Frequency range:	80 - 18.000 Hz *
Dispersion range:	180° x 180°
Sensitivity:	86 dB 1 W
Dimensions:	40 x 40 x 5,6 cm
Installation in:	only plasterboard 12,5 mm
Alcove depth:	-
Weight:	1,1 Kg

CAD Detail

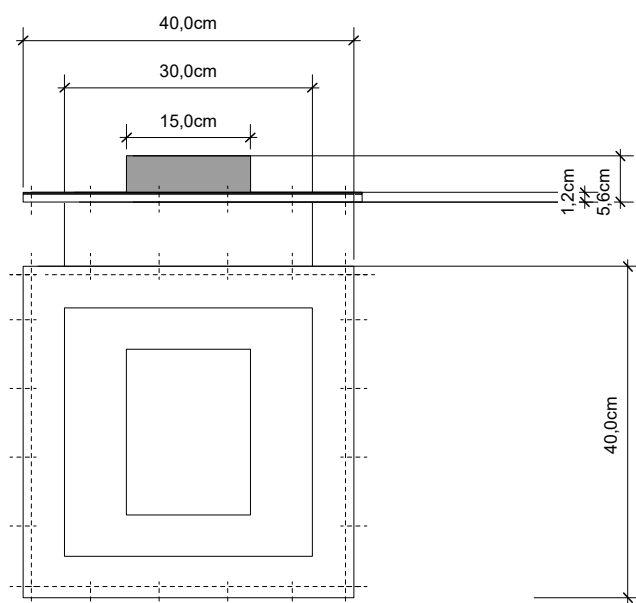

Application areas

Multiroom audio	*****
Surround systems	*****
Conference and media rooms	*****
Exhibitions, trade fairs, museums	*****
Gastronomy, hotels, spas	*****
Stores, sales rooms, POS	*****

Tender specification

Small High-Performance Flat-panel speaker for the invisible installation in walls and ceilings. Qualified for background music / music playback in high quality without the use of a special DSP amplifier..

Warranty period

Ceratec grants a 5-year functional warranty on Exciters and panels, if the installation and setup protocol has been signed and registered with us. Improper use or overloading may void the warranty.